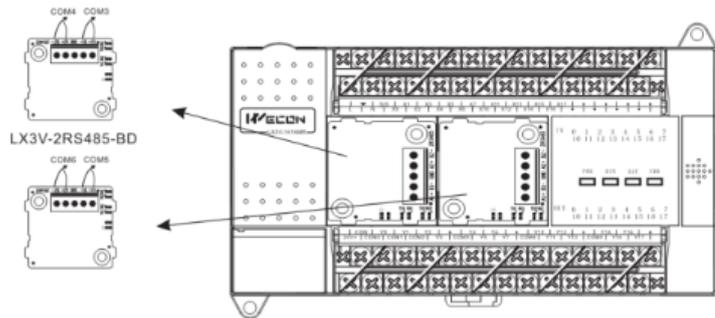# BD Module: LX3V-2RS485-BD

- 2 comunicaciones RS485

Specification

LX3V-RS485-BD is used for communication via RS485, it can be installed on PLC, it has the following purposes.
1) Data transmission by no-protocol
Data transmit to designation register's address by RS instruction.
2) Data transmission by proprietary protocol
Data transmission is in based on 1: N via RS485.

Function of serial communication

COM 1	It supports download and HMI monitoring protocols, supports RS422 and RS485.
COM 2	It supports HMI monitoring protocol, MODBUS RTU protocol, RS instruction, only supports RS485.
COM 3	It supports MODBUS RTU protocol, RS instruction, N: N protocol only supports RS485.
COM 4	It supports MODBUS RTU protocol, RS instruction, N: N protocol only supports RS485.
COM 5	It supports MODBUS RTU protocol, RS instruction, N: N protocol only supports RS485.
COM 6	It supports MODBUS RTU protocol, RS instruction, N: N protocol only supports RS485.