



BD Module: LX3VP-ETH-BD

- 1 comunicación Ethernet



Specification

- 1) It could use LX3VP-ETH-BD to add Ethernet communication ports. It is internally installed in the top of PLC, thus it is not necessary to change the PLC's installation area;
- 2) Maximum number of connections 8, regardless of master and slave;
- 3) The current protocol only supports: MODBUS-TCP.

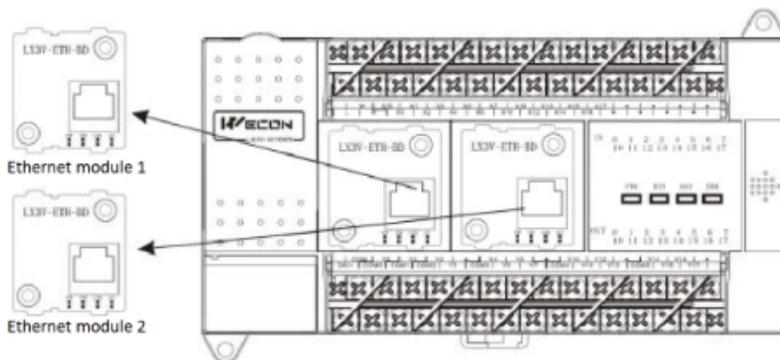

POW: power light, normal state is always bright when connected
 COM: the flicker frequency corresponds to communication with plc
 DATA: data light blinks if the communication with network is normal
 LINK: when connect to the network then the light is lit, if the connect is abnormal, there will be exterminated or chaotic situation